
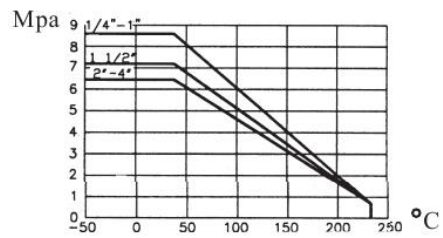


BALL VALVE FULL BORE SCRED END PN64 - 440095

No	Part	Material
1	Body	Stainless steel SS316
2	Screwed end	Stainless steel SS316
3	Ball	Stainless steel SS316
4	Seatring	PTFE 15% glasfibre
5	Bolt	Stainless steel SS304
6	Stem packing	PTFE
7	Stem	Stainless steel SS316
8	Lever	Stainless steel SS304
9		
10		

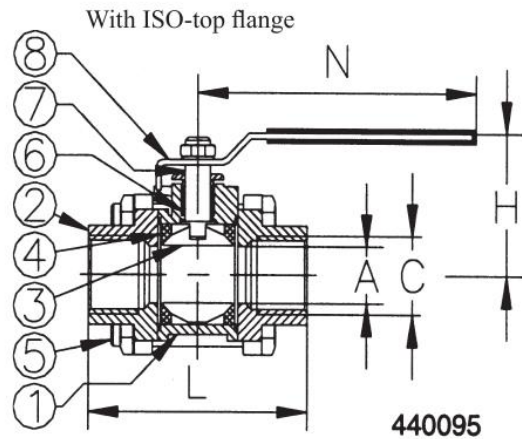

Variants:

Various actuators

Seatring Carbon filled PTFE

Other dimensions/materials on request

DN	G	A		N	L	H	Max working-pressure		Weight Kg
							acc. to above chart		
8	1/4"	11,6		100	64	45			0,4
10	3/8"	12,7		100	64	45			0,5
15	1/2"	15,0		115	66	49			0,6
20	3/4"	20,0		115	84	52			0,9
25	1"	25,4		152	100	72			1,2
32	1 1/4"	32,0		152	116	78			2,1
40	1 1/2"	38,0		186	131	86			2,8
50	2"	50,8		186	151	95			4,4
65	2 1/2"	65,0		234	187	130			8,4
80	3"	80,0		234	213	142			13,3
100	4"	100,0		280	240	173			19,5