

BALL VALVE FULL BORE FLANGED END PN40 - 445164

No	Part	Material
1	Body	Cast steel GSC25
2	Ball	Stainless steel SS304
3	Seating	PTFE
4	Stem	Stainless steel SS304
5	Stem packing	PTFE
6	Lever	Cast iron
7		
8		
9		
10		



Variants:

Various actuators

Seating Carbon filled PTFE

Other dimensions/materials on request

With ISO-top flange

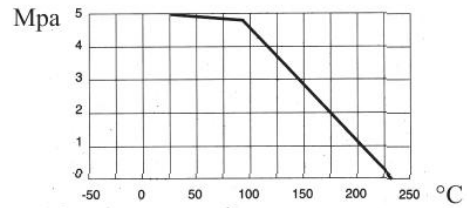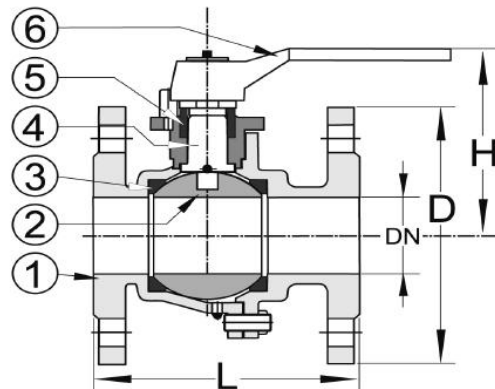

DN	D	n	Hcd	d	L	H	Max working-pressure		Weight Kg
							acc. to above chart		
15	95	4	65	14	115	60			2,2
20	105	4	75	14	120	70			3,0
25	115	4	85	14	125	84			4,3
32	140	4	100	18	130	89			5,8
40	150	4	110	18	140	95			6,9
50	165	4	125	18	150	130			11,0
65	185	8	145	18	170	140			16,0
80	200	8	160	18	180	175			21,0
100	235	8	190	22	190	190			40,0
125	270	8	220	26	325	320			60,0
150	300	8	250	26	350	350			100,0
200	360	12	320	30	400	400			178,0