

BALL VALVE FULL BORE FLANGED END PN40 - 445194



No	Part	Material
1	Body	Stainless steel SS316
2	Ball	Stainless steel SS316
3	Seating	PTFE
4	Stem	Stainless steel SS316
5	Stem packing	PTFE
6	Lever	Stainless steel SS304
7		
8		
9		
10		

Variants:

- Various actuators
- Seating Carbon filled PTFE
- Fire safe approved

Other dimensions/materials on request

With ISO-top flange

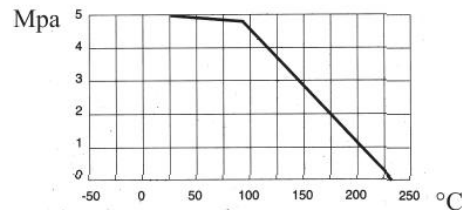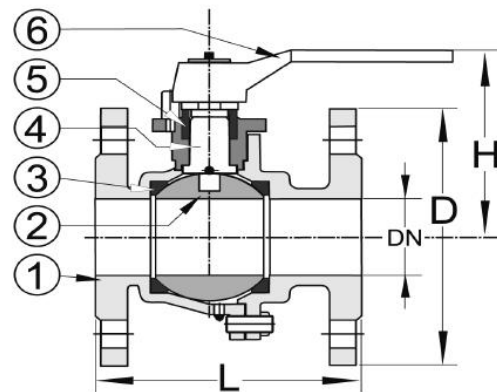

DN	D	n	Hcd	d	L	H	Max working-pressure		Weight Kg
							acc. to above chart		
15	95	4	65	14	115	84			2,2
20	105	4	75	14	120	84			3,0
25	115	4	85	14	125	93			4,3
32	140	4	100	18	130	102			5,8
40	150	4	110	18	140	135			6,9
50	165	4	125	18	150	145			11,0
65	185	8	145	18	170	174			16,0
80	200	8	160	18	180	188			21,0
100	235	8	190	22	190	203			40,0
125	270	8	220	26	325	247			60,0
150	300	8	250	26	350	261			100,0
200	360	12	320	30	400	400			178,0