


BALL VALVE FULL BORE ANSI 150 - 445197

No	Part	Material
1	Body	ASTM A351 - CF8M
2	Cap	ASTM A351 - CF8M
3	Ball	ASTM A351 - CF8M
4	Seat	15% Glassfibre filled PTFE
5	Body seal	PTFE
6	Thrust washer	PTFE
7	Packing	PTFE
8	Stem	ASTM A276 - 316
9	Gland ring	ASTM A276 - 316
10	Stopper	ASTM A276 - 316

Variants:

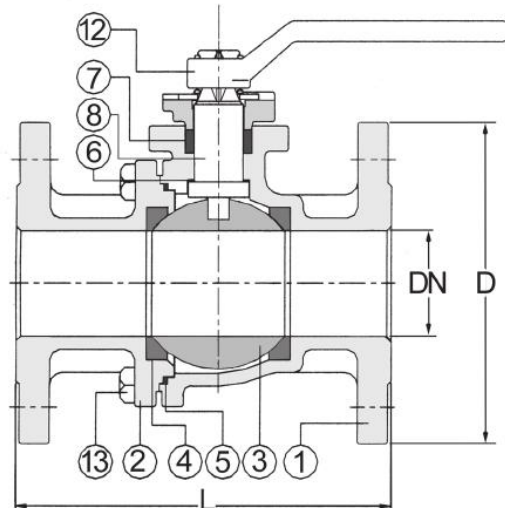

Other dimensions/materials on request

DN	D	n	Hcd	d	L	Max working-pressure Mpa		Weight Kg
						-29 to 38 °C	180 °C	
15	88,9	4	60,3	15	108	1,96	1,58	
20	98,4	4	69,8	15	117	1,96	1,58	
25	108	4	79,4	15	127	1,96	1,58	
32	117	4	88,9	15	140	1,96	1,58	
40	127	4	98,4	15	165	1,96	1,58	
50	152	4	121	18	178	1,96	1,58	
65	178	4	140	18	190	1,96	1,58	
80	191	4	152	18	203	1,96	1,58	
100	229	8	191	18	229	1,96	1,58	
125	254	8	216	23	356	1,96	1,58	
150	279	8	241	23	394	1,96	1,58	
200	343	8	298	23	457	1,96	1,58	
250	406	12	362	26	533	1,96	1,58	
300	483	12	432	26	620	1,96	1,58	