


## BALL VALVE FULL BORE ANSI 300 - 445198

No	Part	Material
1	Body	ASTM A351 - CF8M
2	Cap	ASTM A351 - CF8M
3	Ball	ASTM A351 - CF8M
4	Seat	15% Glassfibre filled PTFE
5	Body seal	PTFE
6	Thrust washer	PTFE
7	Packing	PTFE
8	Stem	ASTM A276 - 316
9	Gland ring	ASTM A276 - 316
10	Stopper	ASTM A276 - 316

Variants:

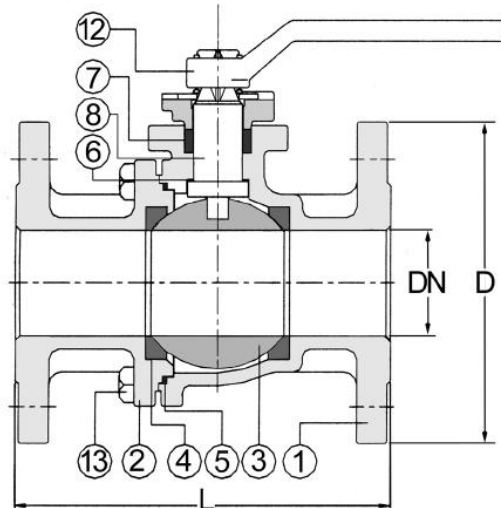

Other dimensions/materials on request

DN	D	n	Hcd	d	L	Max working-pressure Mpa		Weight Kg
						-29 to 38 °C	180 °C	
15	95,2	4	66,7	15	140	5,1	4,51	
20	118	4	82,5	18	153	5,1	4,51	
25	124	4	88,9	19	165	5,1	4,51	
32	133	4	98,4	19	178	5,1	4,51	
40	156	4	114	22	190	5,1	4,51	
50	165	8	127	19	216	5,1	4,51	
65	191	8	149	22	241	5,1	4,51	
80	210	8	168	22	282	5,1	4,51	
100	254	8	200	22	305	5,1	4,51	
125	279	8	235	22	403	5,1	4,51	
150	318	12	270	22	394	5,1	4,51	
200	381	12	330	25	502	5,1	4,51	
250	445	16	389	29	568	5,1	4,51	
300	521	16	451	32	648	5,1	4,51	