


# Repair Coupling RCH-S

**810092  
NBR**

**811092  
EPDM**

D1	Range	L	Weight
20,0	19,3-20,3	60	0,23
21,3	21,0-22,0	60	0,25
25,0	24,0-26,0	60	0,25
26,9	26,0-29,0	60	0,25
33,7	33,0-36,0	60	0,27
38,0	37,0-40,0	60	0,29
42,4	42,0-45,0	60	0,29
44,5	44,0-47,0	60	0,29
48,3	48,0-51,0	60	0,31
54,0	53,0-60,0	80	0,68
57,0	56,0-59,0	80	0,68
60,3	59,0-62,0	80	0,68
69,0	68,5-72,0	80	0,74
76,1	75,0-79,0	80	0,74
84,0	82,0-86,0	110	1,55
88,9	88,0-92,0	110	1,55
104,0	102,0-106,0	110	1,64
108,0	106,0-110,0	110	1,73
114,3	113,0-118,0	110	1,73
129,0	127,5-130,0	106	1,73
133,0	130,5-135,5	111	2,22
139,7	137,0-142,0	111	2,22
154,0	150,5-155,5	111	2,41
159,0	155,5-161,0	111	2,41
168,3	165,5-170,5	111	2,41
204,0	200,0-206,0	116	2,41
219,1	215,0-223,0	150	5,18
254,0	251,0-257,0	150	5,83
267,0	264,0-272,0	150	5,83
273,0	269,0-277,0	150	5,83
304,0	301,5-308,0	150	6,55
323,8	322,0-333,0	150	6,55
355,6	349,0-359,0	150	7,20
406,4	401,0-411,0	150	7,70
457,2	452,0-462,0	150	8,40
508,0	503,0-513,0	150	9,10
558,8	553,0-565,0	150	9,80
609,6	604,0-616,0	150	10,09

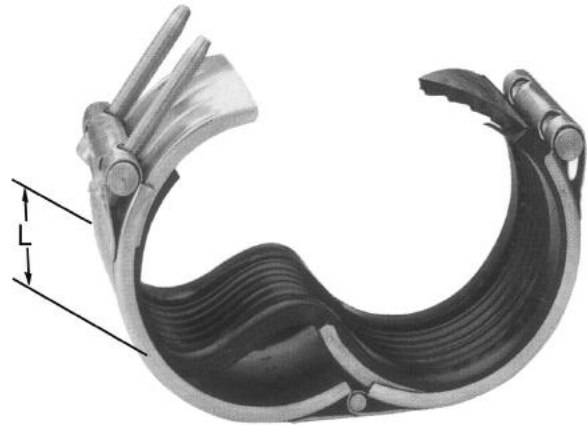

**-Material in Stainless steel SS304  
-Seal in NBR or EPDM**

