




CHECK VALVE

472064
472063

PN 40
PN 25

No	Part	Material
1	Body	Cast steel GSC25
2	Cover	Cast steel GSC25
3	Disc	Stainless steel X20Cr13
4	Seat ring	Stainless steel SS304
5	Spring	Stainless steel SS301
6	Gasket	Graphite

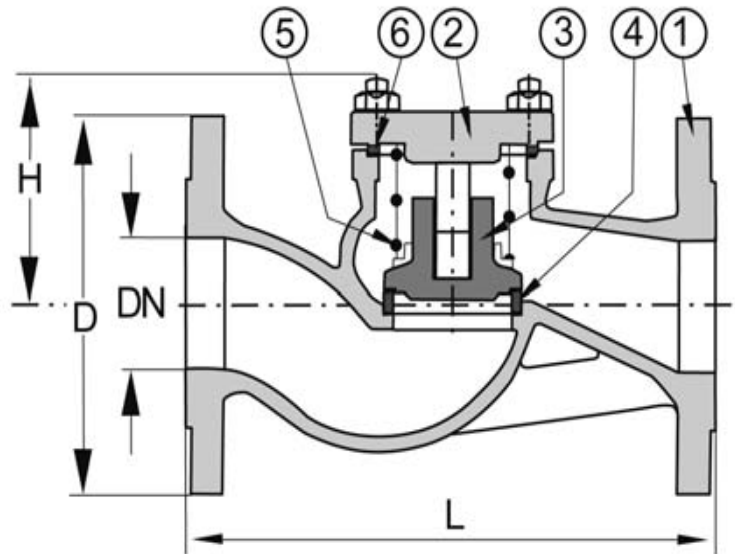

Variants:
DN 200-250 available PN40
Other dimensions/materials on request

DN	D	n x Ød	Hcd	L	H	Max working-pressure		Weight Kg
						Mpa 120 °C	Mpa 400 °C	
15	95	4x14	65	130	65	4,0	2,1	3,5
20	105	4x14	75	150	65	4,0	2,1	4,0
25	115	4x14	85	160	70	4,0	2,1	5,5
32	140	4x18	100	180	80	4,0	2,1	8,0
40	150	4x18	110	200	90	4,0	2,1	11,0
50	165	4x18	125	230	100	4,0	2,1	14,0
65	185	8x18	145	290	130	4,0	2,1	20,0
80	200	8x18	160	310	135	4,0	2,1	31,0
100	235	8x22	190	350	170	4,0	2,1	41,0
125	270	8x26	220	400	205	4,0	2,1	65,0
150	300	8x26	250	480	225	4,0	2,1	91,0
472063 PN25								
200	360	12x26	310	600	260	2,5	1,3	162,0
250	425	12x30	370	730	305	2,5	1,3	312,0